

LED LIGHT ENGINE

RATED WATTAGE	10W, 15W, 20W
DELIVERED LUMENS	Up to 1739 lm Per Head
EFFICACY	Up to 97 lpw Per Head
CCT @ 90CRI	2700K, 3000K, 3500K, 4000K, Warm Dim
COLOR QUALITY	90+ CRI, 2-Step SDCM
LED LIFETIME	55,000 hours @ L70

DELIVERED LUMENS MATRIX - LUMENS PER LIGHT

		10° Optic	30° Optic	50° Optic
10W	2700K (90CRI)	861 lm	949 lm	859 lm
	3000K (90CRI)	914 lm	1007 lm	912 lm
	3500K (90CRI)	958 lm	1055 lm	956 lm
	4000K (90CRI)	994 lm	1094 lm	992 lm
	Warm Dim	556 lm	685 lm	619 lm
15W	2700K (90CRI)	1275 lm	1404 lm	1272 lm
	3000K (90CRI)	1353 lm	1490 lm	1350 lm
	3500K (90CRI)	1418 lm	1562 lm	1415 lm
	4000K (90CRI)	1471 lm	1620 lm	1467 lm
	Warm Dim	854 lm	1051 lm	950 lm
20W	2700K (90CRI)	1534 lm	1689 lm	1530 lm
	3000K (90CRI)	1628 lm	1793 lm	1624 lm
	3500K (90CRI)	1706 lm	1879 lm	1702 lm
	4000K (90CRI)	1770 lm	1949 lm	1766 lm

SILENT VU™ OPTICS TECHNOLOGY

OPTICS	10°, 30°, 50° Installed
ADJUSTABLE	45° tilt, Infinite Rotation, Tool Free Locking Below Ceiling
MEDIA	Clear, Solite, Frosted, Linear Spread, Hex Louver, Wall Wash

POWER SUPPLY

INPUT VOLTAGE	120-277V, or 120V
DIMMING	TRIAC, ELV, 0-10V, EcoSystem®, DALI


INSTALLATION OPTIONS

- Flush mount to ceiling over standard J-Box
- Mounts with or without conduit

LISTINGS AND WARRANTY

- cULus Listed to US and Canadian standards for Damp Locations
- Five (5) years limited warranty
- CA Title 24 JA-8 Compliant



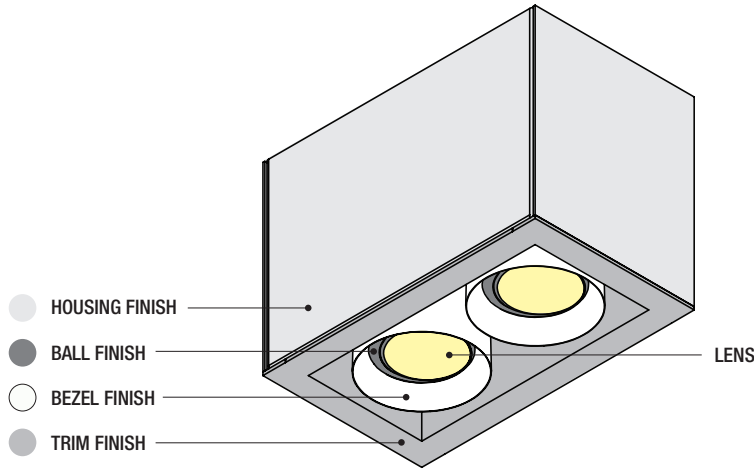

Under Trim:
Inside trim finish is always the same as the Flange finish.

FINISH

- **ABL** (Aegean Blue)
- **PNC** (Painted Natural Copper)
- **BB** (Burnished Bronze)
- **RD** (Red)
- **BK** (Gloss Black)
- **SGR** (Sage Green)
- **BLU** (Blue)
- **SND** (Sand)
- **DVG** (Dove Gray)
- **SS** (Satin Silver)
- **FLG** (Flannel Gray)
- **TBZ** (Textured Bronze)
- **GA** (Galvanized)
- **TGP** (Textured Graphite)
- **GWT** (Gloss White)
- **TNG** (Tangerine)
- **LG** (Lime Green)
- **TTL** (Tahitian Teal)
- **MB** (Matte Black)
- **WT** (Semi Gloss White)
- **MBL** (Midnight Blue)
- **YEL** (Yellow)
- **PNA** (Painted Natural Aluminum)

ORDER MATRIX

TRIM ORDER MATRIX (EXAMPLE: S3-1L-BKBKBK-279010-CLFR-00)

TRIM STYLE	BALL FINISH	BEZEL FINISH	TRIM FINISH	CCT	CRI	OPTIC	MEDIA 1	MEDIA 2	REV
S3-1L 1 Light	-ABL (Aegean Blue)	ABL	ABL	-27 (2700K)	90 (CRI)	-10 (10°)	-NL (No Lens)	-NL (No Lens)	-00
	-BB (Burnished Bronze)	BB	BB	-30 (3000K)			-CL (Clear Lens)	-CL (Clear Lens)	
S3-2L 2 Light	-BK (Gloss Black)	BK	BK	-35 (3500K)		-50 (50°)	-FR (Frosted)	-FR (Frosted)	
	-BLU (Blue)	BLU	BLU	-40 (4000K)			-MP (Solite)	-MP (Solite)	
S3-3L 3 Light	-DVG (Dove Gray)	DVG	DVG	-WD* (Warm Dim)			-LS (Linear Spread)	-LS (Linear Spread)	
	-FLG (Flannel Gray)	FLG	FLG	*WD available with 10W or 15W options only.			-HEX (Hex Cell)	Holds 1 Media only when HEX or WW selected.	
S3-4L 4 Light Linear	-GA (Galvanized)	GA	GA				-WW (Wall Wash)		
	-GWT (Gloss White)	GWT	GWT						
	-LG (Lime Green)	LG	LG						
	-MB (Matte Black)	MB	MB						
	-MBL (Midnight Blue)	MBL	MBL						
	-PNA (Painted Natural Aluminum)	PNA	PNA						
	-PNC (Painted Natural Copper)	PNC	PNC						
	-RD (Red)	RD	RD						
	-SGR (Sage Green)	SGR	SGR						
	-SND (Sand)	SND	SND						
	-SS (Satin Silver)	SS	SS						
	-TBZ (Textured Bronze)	TBZ	TBZ						
	-TGP (Textured Graphite)	TGP	TGP						
	-TNG (Tangerine)	TNG	TNG						
	-TTL (Tahitian Teal)	TTL	TTL						
	-WT (Semi Gloss White)	WT	WT						
	-YEL (Yellow)	YEL	YEL						

MEDIA

- S2-Lens-CL-0** (Clear Lens)
- S2-Lens-FR-0** (Frosted Lens)
- S2-Lens-MP-0** (Solite Lens)
- S2-Lens-LS-0** (Linear Spread)
- S2-Lens-HEX-0*** (Hex Louver)
- S2-Lens-WW-0*** (Wall Wash)

BEAM SPREADS

Downlight Adjustable Wall Wash

OPTICS

- S2-10-OPTIC-0** (10° Spot)
- S2-30-OPTIC-0** (30° Narrow Flood)
- S2-50-OPTIC-0** (50° Flood)

10° Spot 30° Narrow Flood 50° Flood



GYROSHIFT
MULTIPLES

**GYROSHIFT MULTIPLES
3" ADJUSTABLE FLUSH MOUNT**

PROJECT: _____

TYPE: _____

NOTE: _____

SPEC-00282 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3AF

ORDER MATRIX


HOUSING ORDER MATRIX (EXAMPLE: S3AF-1LFL-WT15S-00)

HOUSING SIZE	HOUSING TYPE	HOUSING FINISH	WATTS PER LIGHT	DRIVER	REV
S3AF-1L 1 Light Housing	FL (Flush Mount)	-ABL (Aegean Blue)	-10 (10W)	S (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) <i>Forward and reverse phase dimming at 120V only.</i>	-00
	FC (Flush Conduit)	-BB (Burnished Bronze)	-15 (15W)		
S3AF-2L 2 Light Housing		-BK (Gloss Black)	-20* (20W)	L3 (Lutron Hi-Lume® Fade-to-Black 1% 120-277V)	
		-BLU (Blue)			
S3AF-3L 3 Light Housing		-DVG (Dove Gray)	* Not available with Warm Dim.	EL2 (EldoLED 0-10V 1% 120-277V)	
		-FLG (Flannel Gray)			
S3AF-4L 4 Light Housing		-GA (Galvanized)			
		-GWT (Gloss White)			
		-LG (Lime Green)			
		-MB (Matte Black)			
		-MBL (Midnight Blue)			
		-PNA (Painted Natural Aluminum)			
		-PNC (Painted Natural Copper)			
		-RD (Red)			
		-SGR (Sage Green)			
		-SND (Sand)			
		-SS (Satin Silver)			
		-TBZ (Textured Bronze)			
		-TGP (Textured Graphite)			
		-TNG (Tangerine)			
		-TTL (Tahitian Teal)			
		-WT (Semi Gloss White)			
		-YEL (Yellow)			




LINE DRAWINGS

S3AF-1LFL 3" - 1 Light Flush Mount

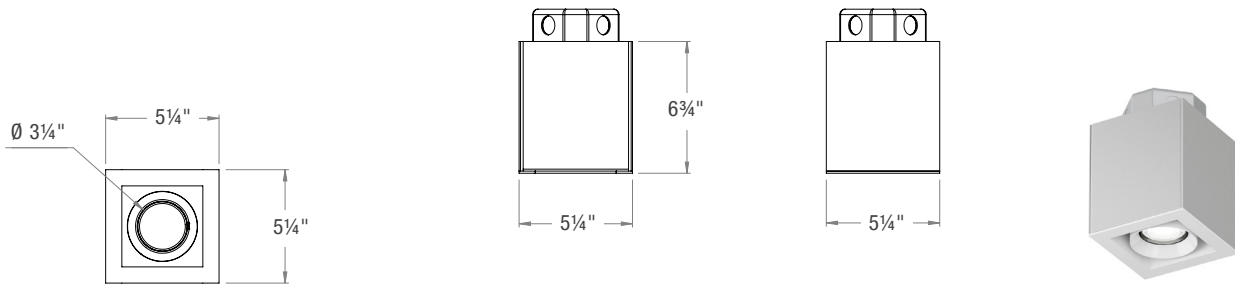


S3AF-2LFL 3" - 2 Light Flush Mount

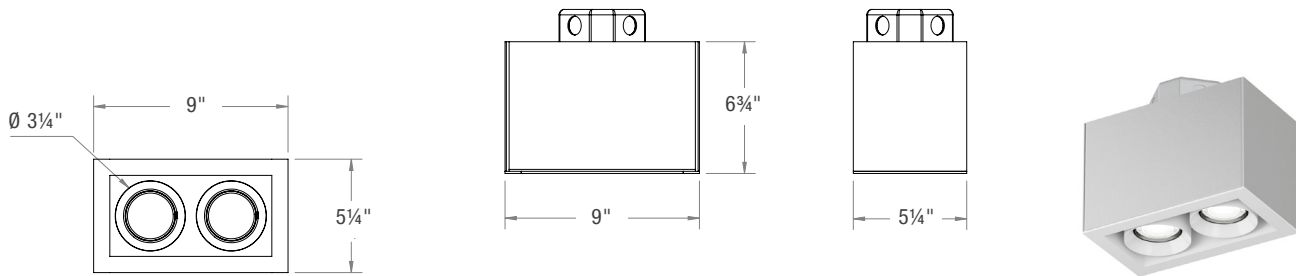


LINE DRAWINGS

S3AF-3LFL
3" - 3 Light
Flush Mount

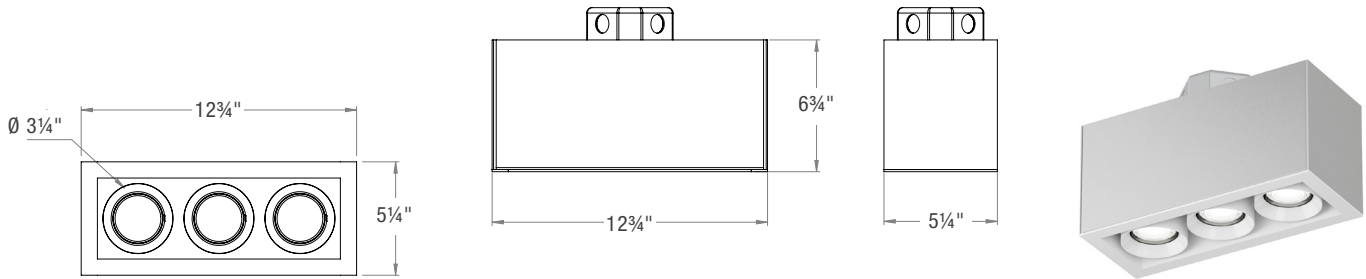

S3AF-4LFL
3" - 4 Light Linear
Flush Mount

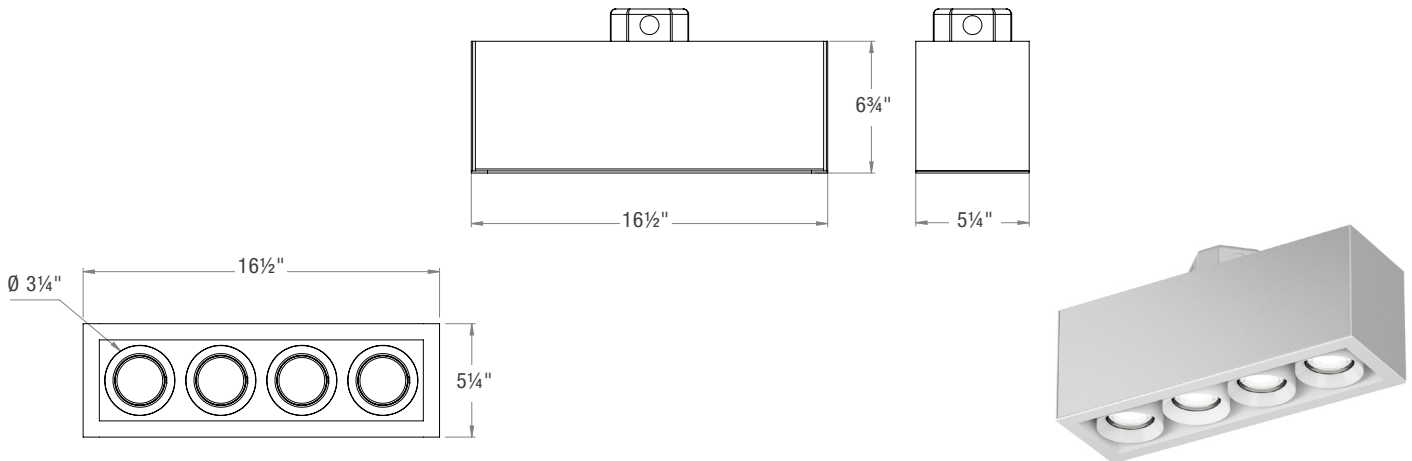

STANDARD FINISHES



ABL
Aegean Blue



BB
Burnished Bronze



BK
Gloss Black



BLU
Blue



DVG
Dove Gray



FLG
Flannel Gray




GA
Galvanized




GWT
Gloss White



LG
Lime Green



MB
Matte Black



MBL
Midnight Blue



PNA
Painted Natural Aluminum



PNC
Painted Natural Copper



RD
Red



SGR
Sage Green



SND
Sand



SS
Satin Silver



TBZ
Textured Bronze



TGP
Textured Graphite



TNG
Tangerine



TTL
Tahitian Teal



WT
Semi Gloss White



YEL
Yellow