

# 5" Wall Mount Cylinder

## 35W LED Up and Downlight (Round or Square)


Catalog #:

Type:







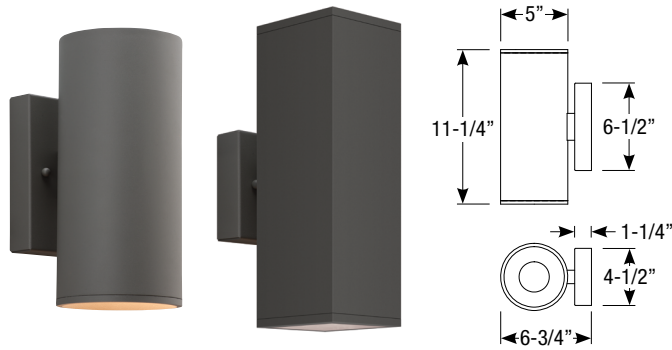







Project:

Date:

Notes:



### STANDARD FINISHES

 <b>ABL</b> (Aegean Blue)	 <b>PNC</b> (Painted Natural Copper)
 <b>BB</b> (Burnished Bronze)	 <b>RD</b> (Red)
 <b>BK</b> (Gloss Black)	 <b>SGR</b> (Sage Green)
 <b>BLU</b> (Blue)	 <b>SND</b> (Sand)
 <b>DVG</b> (Dove Gray)	 <b>SS</b> (Satin Silver)
 <b>FLG</b> (Flannel Gray)	 <b>TBZ</b> (Textured Bronze)
 <b>GA</b> (Galvanized)	 <b>TGP</b> (Textured Graphite)
 <b>GWT</b> (Gloss White)	 <b>TNG</b> (Tangerine)
 <b>LG</b> (Lime Green)	 <b>TTL</b> (Tahitian Teal)
 <b>MB</b> (Matte Black)	 <b>WT</b> (Semi Gloss White)
 <b>MBL</b> (Midnight Blue)	 <b>YEL</b> (Yellow)
 <b>PNA</b> (Painted Natural Aluminum)	

### Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	17.5 / 35W	1149 / 2265lm	65lpw
3000K	90 CRI	17.5 / 35W	1322 / 2401lm	69lpw
3500K	90 CRI	17.5 / 35W	1322 / 2401lm	69lpw
4000K	90 CRI	17.5 / 35W	1633 / 2569lm	73lpw

### Multiplier for Delivered Lumens

Wattage	10	15	20	25	30	35
Multiplier	0.34	0.5	0.61	0.73	0.81	1

### Specifications

#### Field Replaceable LED Light Engine

- 35W LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

#### Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

#### Mounting

Square 6-1/2" x 4-1/2" x 1-1/4" canopy included with standard universal dim driver.  
(7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)



JA8 TITLE 24 COMPLIANT

## Order Matrix

5" Wall Mount Cylinder (Example: LWUD5-30-35-10-10-BK-4-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round <b>LWUD5</b> (Up and Down)	-10	-27 (2700K / 90 CRI)	-10	-10	-ABL (Aegean Blue)	(blank) (No coating)	-4	-S <sup>2</sup> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	(blank) (Damp Listed)
	-15	-30 (3000K / 90 CRI)	-30	-30	-BB (Burnished Bronze)	-C (Coating)		-L3 <sup>1</sup> (Lutron Hi-Lume® Fade-to-Black 1% 120-277V)	-WL <sup>3</sup> (Wet Listed)
	-20	-35 (3500K / 90 CRI)	-50	-50	-BK (Gloss Black)			-EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V)	
	-25	-40 (4000K / 90 CRI)	-80	-80	-BLU (Blue)			-EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V)	
Square <b>SLWUD5</b> (Up and Down) <small>Square Housing only for use in damp locations.</small>	-30				-DVG (Dove Gray)			-DMX <sup>1</sup> (DMX 1% 120-277V)	
	-35				-FLG (Flannel Gray)				
					-GA (Galvanized)				
					-GWT (Gloss White)				
					-LG (Lime Green)				
					-MBL (Midnight Blue)				
					-MB (Matte Black)				
					-PNA (Painted Natural Aluminum)				
					-PNC (Painted Natural Copper)				
					-RD (Red)				
					-SGR (Sage Green)				
					-SND (Sand)				
				-SS (Satin Silver)					
				-TBZ (Textured Bronze)					
				-TGP (Textured Graphite)					
				-TNG (Tangerine)					
				-TTL (Tahitian Teal)					
				-WT (Semi Gloss White)					
				-YEL (Yellow)					

### Emergency

<b>EM-1000</b>	(25W Remote Inverter)
<b>EM-1002</b>	(10W Remote Inverter)
<b>EM-1003</b>	(35W Remote Inverter)
<b>EM-1003-CA</b>	(35W Remote Inverter) Title 20
<b>EM-1004</b>	(50W Remote Inverter)
<b>EM-1006</b>	(25W Remote Inverter) Title 20

### Optic

<b>EDL5-10-OPTIC-1</b>	(10° Spot)
<b>EDL5-30-OPTIC-1</b>	(30° Spot)
<b>EDL5-50-OPTIC-1</b>	(50° Spot)
<b>EDL5-80-OPTIC-1</b>	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00236 Revised 10/14/2022

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.csllighting.com  
©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.  
All rights reserved. Subject to change without notice.

