



CSL | GYROSHIFT® MULTIPLES

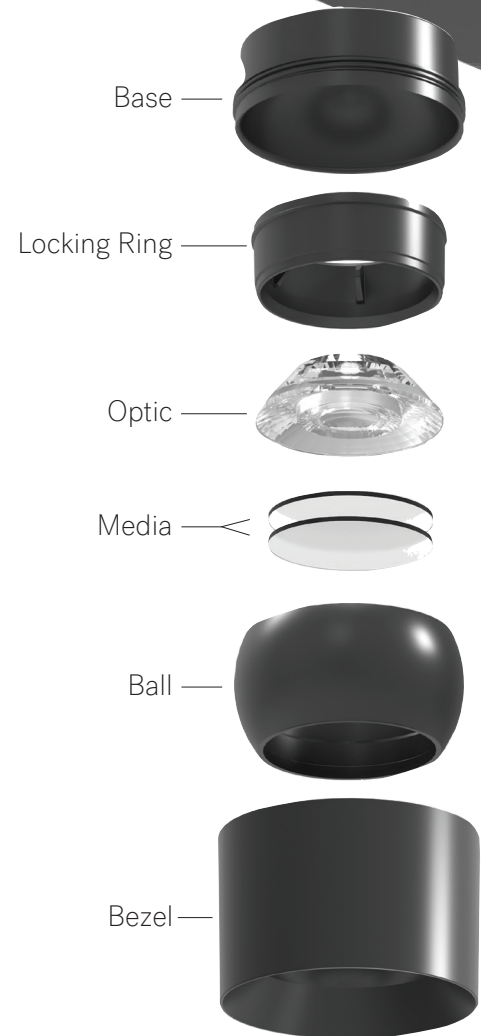

A DIFFERENT WAY TO DOWNLIGHT
ADJUSTABLE FROM 0° TO 45° WITH INFINITE ROTATION

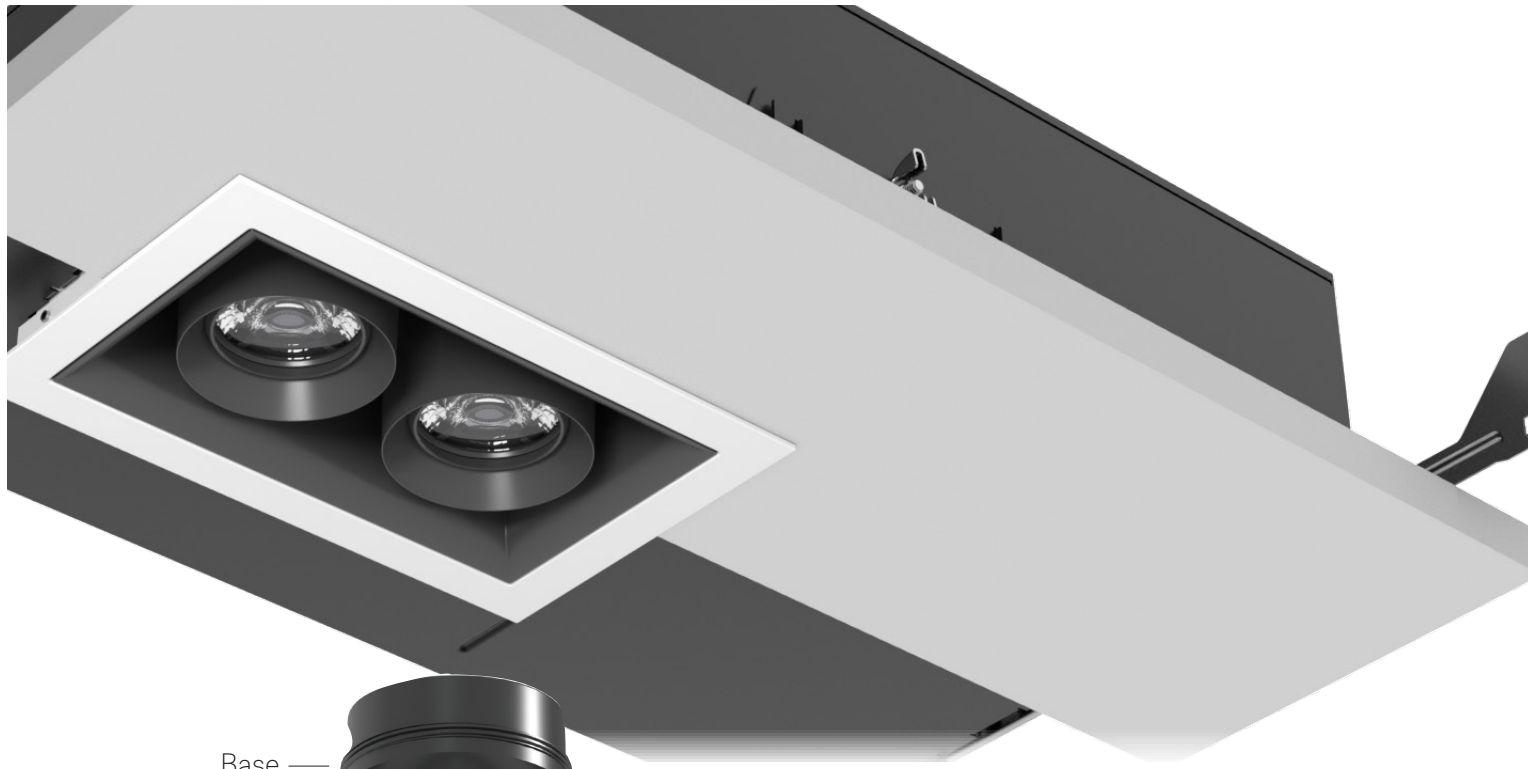


CSL GyroShift™ 1-4 Light Multiples incorporate the patented GyroShift™ optic system into multiple head recessed downlight fixtures that can be installed in shallow plenum spaces as little as 3 1/2". The heads are designed to stay fixed while each individual optic pans and tilts up to 45° independently of the others, enabling crisp accents, broad washes, and tailored light wherever you need it -in multiple directions. The patented optical system rotates the optic independently from the light source, eliminating cut off from the trim to provide a round beam of light with superior light control. The refined below-the-ceiling aesthetic is maintained-even when lights have been shifted.

Main Features:

- Independently Adjustable Heads with out breaking the plane of the ceiling with consistent below the ceiling appearance.
- Small footprint above the ceiling. 3.5" Plenum height and all SKU's can fit within a 16" joist spacing.
- Patented 'Z' height adjustment from 5/8-2" ceiling heights. Allowing the Trim secure lock to the housing yet always index to the room side of the ceiling.
- Field serviceable Light and Driver Assembly modules all from below the ceiling.
- Competitively priced without compromising delivered lumens and performance.
- Standard single driver powering multiple heads or with premium individually controlled heads using a DMX control system.

GYROSHIFT MULTIPLES LED DOWNLIGHT

ADJUSTABILITY	45° TILT, INFINITE ROTATION, TOOL FREE LOCKING BELOW CEILING
AVAILABLE OPTICS	10°, 30°, 50° BEAM SPREAD
MEDIA	CLEAR, SOLITE, FROSTED, LINEAR SPREAD, HEX LOUVER, WALL WASH
RATED WATTAGES	54.1W FOR S2, UP TO 79.1W FOR S3
DELIVERED LUMENS	4257 LUMENS FOR S2, UP TO 6426 LUMENS ON S3
EFFICACY (LM/W)	UP TO 99 LPW
CCT @ 90 CRI	2700K, 3000K, 3500K, 4000K, WARM DIM
COLOR QUALITY	90CRI STATIC WHITE, 98CRI WD
LED LIFETIME	>55,000 HOURS @ L70
INPUT VOLTAGE	120/277V, 50/60Hz
DIMMING TYPES	TRIAC, ELV AND 0-10VDC AND LUTRON HOMEWORKS/ECOSYSTEM OPTIONS AVAILABLE
SERVICABILITY	ALL OPTIONS: BELOW CEILING ACCESS

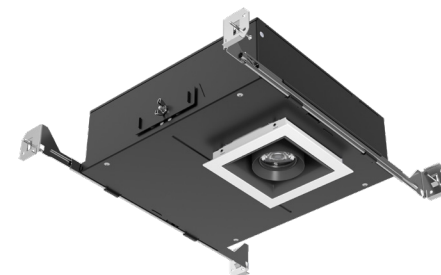

GyroShift Multiples Single Head Trim



GyroShift Multiples Dual Head Trim



GyroShift Multiples Triple Head Trim



GyroShift Multiples Quad Head Trim



GyroShift Multiples Square Head Trim



CSL

CREATIVE SYSTEMS LIGHTING

A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue | City of Industry, CA 91744
P: 626.336.4511 | F: 626.330.4266 | csllighting.com