

CSL | ECO DOWNLIGHTS




HIGH-PERFORMANCE ILLUMINATION FOR EVERY SPACE
1", 3", 5" LED RECESSED DOWNLIGHT

CSL | ECO DOWNLIGHTS

Meet the high-performance, cost-effective LED Downlight designed to over-deliver on light quality, efficiency, and versatility. The ECO downlight from CSL offers an LED solution that fits any application, including general, task, or accent lighting for residential, commercial, hospitality and retail spaces. The ECO Downlight is available in adjustable and fixed models and can be installed into shallow plenums as low as 2¾" for the 1" light and 2½" for the 3" and 5".

1", 3", 5" apertures deliver 700 to 2700 lumens with minimal glare. CSL uses the highest quality 90+ CRI, 2-Step SDCM LED chips powered by high-performance dimming drivers. ECO housings pair perfectly with your choice of trim style and colors to bring the light where you need it and provide a clean ceiling aesthetic.

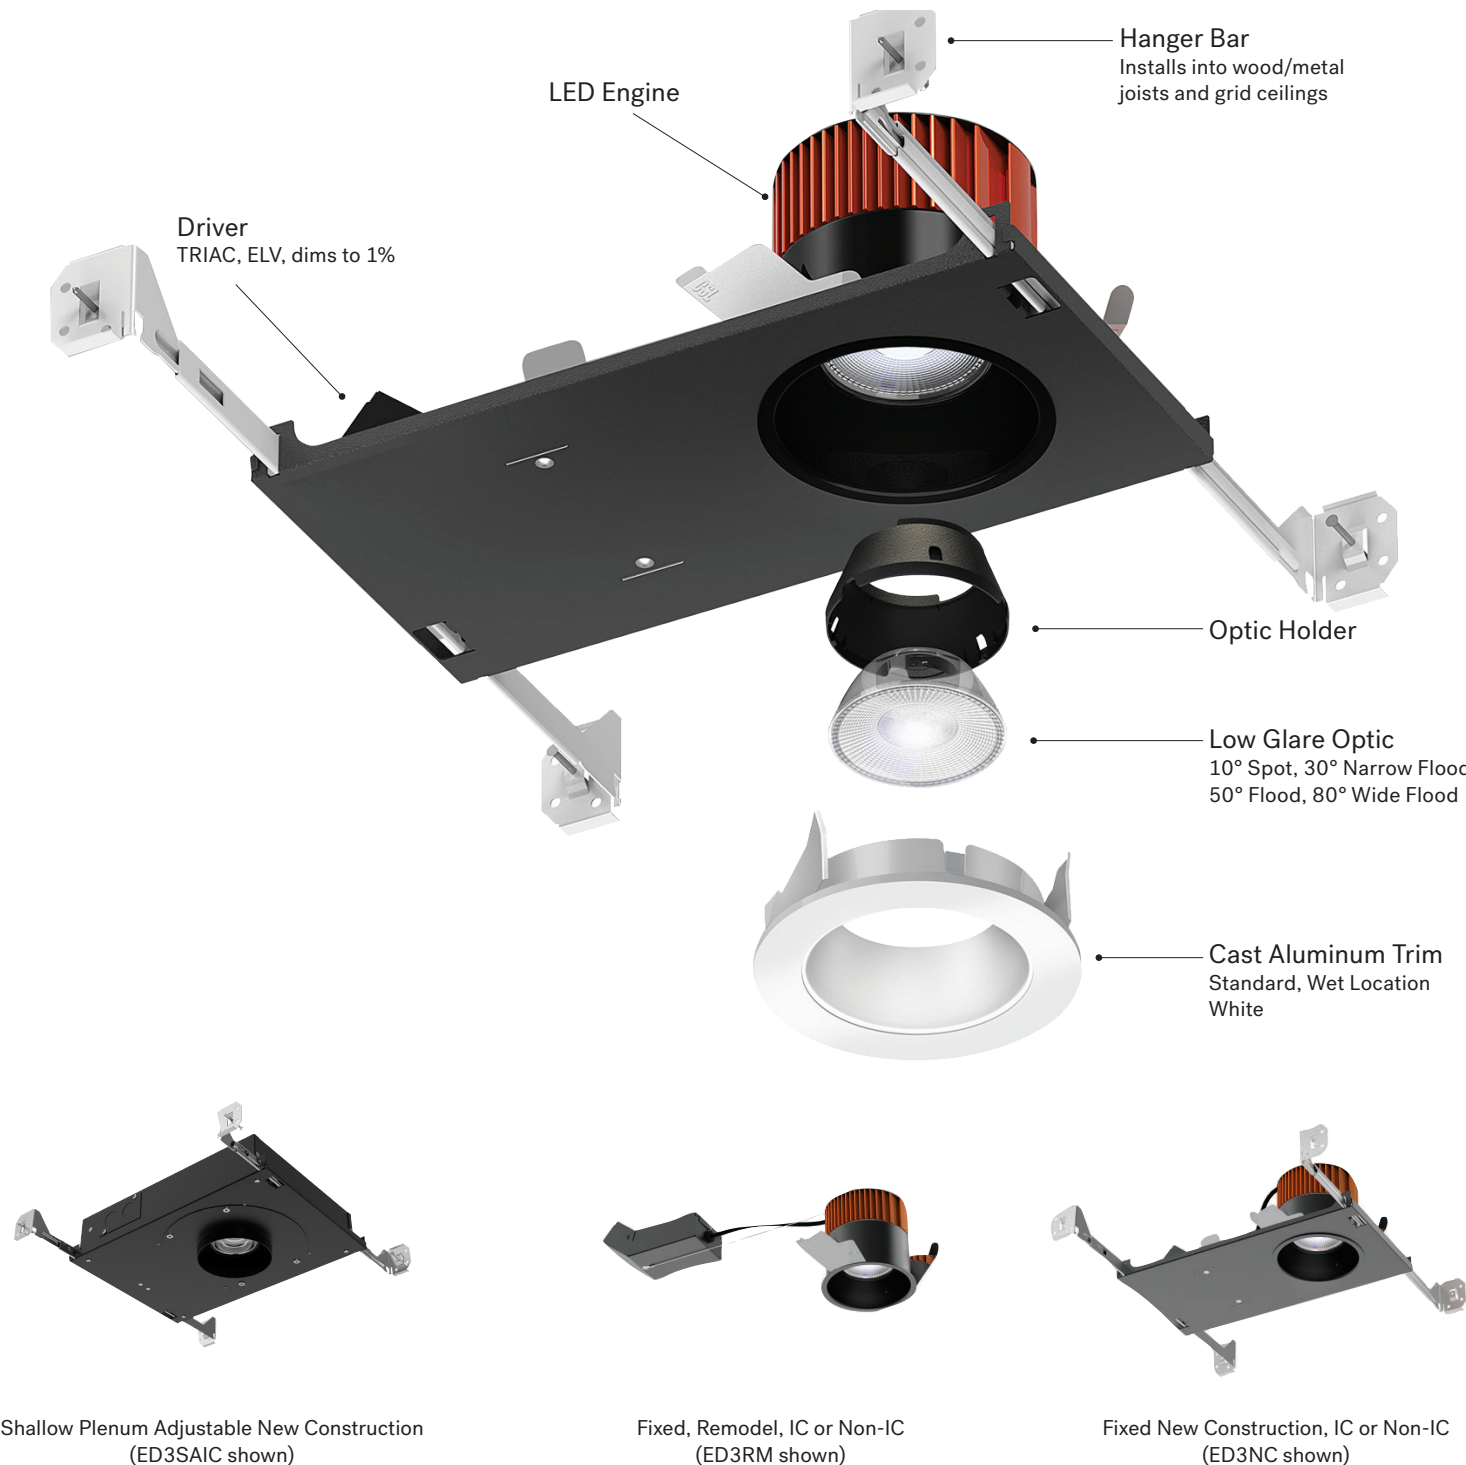

TRIM OPTIONS (3" trims shown)

ECO Downlights are compatible with a wide variety of trims, creating the perfect finishing touch for commercial and residential spaces.



ECO DOWNLIGHTS

	1"	3"	5"
RATED WATTAGES	12W & 10W 14W (SAIC Warm Dim)	21W & 12W 15W (NIC & RIC Warm Dim)	30W, 25W (SAIC), 16W (NIC & RIC Warm Dim)
DELIVERED LUMENS	UP TO 1005 LM	UP TO 2158 LM	UP TO 3132 LM
EFFICACY	UP TO 127 LPW	UP TO 108 LPW	UP TO 136 LPW
ADJUSTABILITY	0° TO 30° TILT (ADJUSTABLE HOUSINGS ONLY)	0° TO 45° TILT (ADJUSTABLE HOUSINGS ONLY)	
OPTICS	50° INSTALLED, 10°, 30°, 80° AVAILABLE		
MEDIA	CLEAR, SOLITE, FROSTED, LINEAR SPREAD, HEX LOUVER		
CCT @ 90 CRI	2700K, 3000K, 3500K, 4000K, WARM DIM		
LED LIFETIME	>55,000 HRS @ L80		
INPUT VOLTAGE	120/277V 50/60Hz		
DIMMING TYPES	TRIAC, ELV AND 0-10V, DIMS TO 1%		
MINIMUM PLENUM	SHALLOW PLENUM DOWN TO 2½"		
SERVICABILITY	BELOW CEILING ACCESS		

Note: Max delivered lumens available with 30° optic at 4000K CCT.



Consult spec sheet for full product details.



CSL

CREATIVE SYSTEMS LIGHTING

14508 Nelson Avenue | City of Industry, CA 91744

P: 626.336.4511 | F: 626.330.4266 | cslighting.com