

GyroShift 5" Cylinder

30W LED Pendant
Round


Catalog #:

Type:

Project:

Date:

Notes:

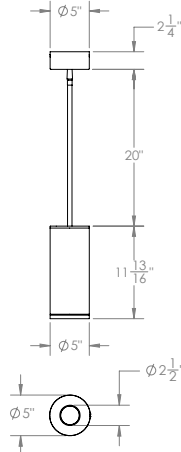

STANDARD FINISHES

	ABL (Aegean Blue)		PNC (Painted Natural Copper)
	BB (Burnished Bronze)		RD (Red)
	BK (Gloss Black)		SGR (Sage Green)
	BLU (Blue)		SND (Sand)
	DVG (Dove Gray)		SS (Satin Silver)
	FLG (Flannel Gray)		TBZ (Textured Bronze)
	GA (Galvanized)		TGP (Textured Graphite)
	GWT (Gloss White)		TNG (Tangerine)
	LG (Lime Green)		TTL (Tahitian Teal)
	MB (Matte Black)		WT (Semi Gloss White)
	MBL (Midnight Blue)		YEL (Yellow)
	PNA (Painted Natural Aluminum)		

Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	30W	1745 lm	58 lpw
3000K	90 CRI	30W	1850 lm	61 lpw
3500K	90 CRI	30W	1945 lm	64 lpw
4000K	90 CRI	30W	2025 lm	68 lpw
Warm Dim	-	10W	608 lm	61 lpw

Lumens will vary depending on CCT, optic & lens option

Specifications

Field Replaceable LED Light Engine

- 30W LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 45 degree adjustability with 360 degree aiming

Finishes

Available in many colors with optional coastal coating to protect finish in coastal environments

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations

Mounting

- 4' of stem included; (1) 6", (2) 12" & (1) 18" (includes couplers)
Contact the factory for custom sloped ceiling projects
- 10' field adjustable cord available, must specify
- 5" x 2-1/4" round canopy included with standard universal dim driver (7-1/8" x 2-1/4" round canopy with Lutron and eldoLED drivers)



Order Matrix

GyroShift 5" Pendant Cylinder (Example: LP5-SFT-10S2710ABL-NLNL-ST-0)

Series	Wattage	Driver	CCT / CRI	Optic	Finishes	Coastal Coating Option	Media 1	Media 2	Option	Rev	Canopy	
LP5-SFT (Round)	-10 (10W)	S ² (ERP Universal Dim, Triac/ELV 0-10V 10% 120-277V)	27 (2700K/90 CRI)	10	ABL	(blank) (No coating)	-NL (No Lens)	NL	-ST ¹ 4' Stem	-0	(blank) (standard canopy)	
	-15 (15W)		30 (3000K/90 CRI)	30	BB	-C (Coating)	-CL (Clear Lens)	CL	-BC 10' Black Cord		-CC1 ⁵ (Conduit 3-1/4" canopy)	
	-20 (20W)		35 (3500K/90 CRI)	50	BK		-FR (Frosted Lens)	FR	-WC 10' White Cord			
	-25 (25W)	L1 ¹ (Lutron Hi-lume [®] 2-Wire 1% 120V)	40 (4000K/90 CRI)		BLU		-MP (Solite Lens)	MP	-LV ² 10' Low Voltage Aircraft Cable		-CC2 (Conduit 3-7/8" canopy)	
	-30 (30W)		WD* (1850-3000K)		DVG		-LS (Linear Spread)	LS				
					FLG		-HEX* (Hex Louver)					
			L3 ¹ (Lutron Hi-lume [®] Fade-to-Black 1% 120-277V)		GA		-WW* (Wall Wash)					
			EL1 ¹ (eldoLED DALI 1% 120-277V)		GWT							
			EL2 ¹ (eldoLED 0-10V 1% 120-277V)	*Note: Warm dim max wattage is 10W	LG			* Note: Can only fit 1 media if HEX or WW is selected				
			DMX ¹ (DMX 1% 120-277V)	*For CCT that are out of range, please consult factory	MB							
					MBL							
					PNA							
				PNC								
				RD								
				SGR								
				SND								
				SS								
				TBZ								
				TGP								
				TNG								
				TTL								
				WT								
				YEL								

1. Includes larger canopy
2. Forward and reverse dimming at 120V only
3. Damp location Rated
4. Stem kit includes: (1) x 6", (2) x 12", (1) x 18"
5. CC1 and CC2 only for S driver option

Media

S3-LENS-CL-0 (Clear Lens)	S3-LENS-LS-0 (Linear Spread)	*Note: Can only fit 1 media if HEX or WW is selected
S3-LENS-FR-0 (Frosted Lens)	S3-LENS-HEX-0* (Hex Louver)	
S3-LENS-MP-0 (Solite Lens)	S3-LENS-WW-0* (Wall Wash)	

Emergency

EM-1000 (25W LED Remote Inverter)
EM-1002 (10W LED Remote Emergency Driver)

Spec-00255 Revised 10/08/2021

Patent: www.csllighting.com/patents

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.csllighting.com
©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc. All rights reserved. Subject to change without notice.

