GyroShift 3” Wall Mount Cylinder

25W LED Downlight
Round

Catalog #: Type:

Project: Date:

Notes:

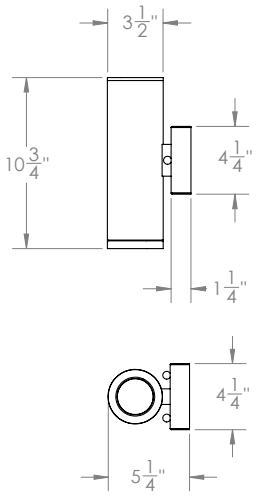

STANDARD FINISHES

- **ABL** (Aegean Blue)
- **BB** (Burnished Bronze)
- **BK** (Gloss Black)
- **BLU** (Blue)
- **DVG** (Dove Gray)
- **FLG** (Flannel Gray)
- **GA** (Galvanized)
- **GWT** (Gloss White)
- **LG** (Lime Green)
- **MB** (Matte Black)
- **MBL** (Midnight Blue)
- **PNA** (Painted Natural Aluminum)
- **PNC** (Painted Natural Copper)
- **RD** (Red)
- **SGR** (Sage Green)
- **SND** (Sand)
- **SS** (Satin Silver)
- **TBZ** (Textured Bronze)
- **TGP** (Textured Graphite)
- **TNG** (Tangerine)
- **TTL** (Tahitian Teal)
- **WT** (Semi Gloss White)
- **YEL** (Yellow)

Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	25W	1550 lm	62 lpw
3000K	90 CRI	25W	1640 lm	65 lpw
3500K	90 CRI	25W	1725 lm	69 lpw
4000K	90 CRI	25W	1795 lm	72 lpw
Warm Dim	-	10W	608 lm	61 lpw

Lumens will vary depending on CCT, optic & lens option

Specifications

Field Replaceable LED Light Engine
- 25W LED with 2 SDCM binning
- 2700K, 3000K,3500K and 4000K at 90 CRI
- 10º, 30º and 50º optics included
- 45º adjustability with 360º aiming

Field Replaceable Dimming Driver
- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Downlight Cylinder
Utilizes one LED to illuminate in one direction

Mounting
Square 4-1/4” x 1-1/4” canopy included with standard universal dim driver.
(7-1/2” x 6” x 1-1/4” canopy included with Lutron and eldoLED drivers)

Finishes
Available in many colors with optional coastal coating to protect finish in coastal environments

Listing / Warranty
- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location

Order Matrix

GyroShift 3” Wall Mount Cylinder (Example: LW3-SFT-10S2710ABL-NLNL-0)

Series	Wattage	Driver	CCT / CRI	Optic	Finishes	Coastal Coating Option	Media 1	Media 2	Rev
LW3-SFT (Round)	☐ **-10** (10W) ☐ **-15** (15W) ☐ **-20** (20W) ☐ **-25** (25W)	☐ **S**[2] (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V) ☐ **L1**[1] (Lutron Hi-lume® 2-Wire 1% 120V) ☐ **L3**[1] (Lutron Hi-lume® Fade-to-Black 1% 120-277V) ☐ **EL1**[1] (eldoLED DALI 1% 120-277V) ☐ **EL2**[1] (eldoLED 0-10V 1% 120-277V) ☐ **DMX**[1] (DMX 1% 120-277V)	☐ **27** (2700K/90 CRI) ☐ **30** (3000K/90 CRI) ☐ **35** (3500K/90 CRI) ☐ **40** (4000K/90 CRI) ☐ **WD*** (1850-3000K) *Note: Warm dim max wattage is 10W *For CCT that are out of range, please consult factory	☐ **10** ☐ **30** ☐ **50**	☐ **ABL** ☐ **BB** ☐ **BK** ☐ **BLU** ☐ **DVG** ☐ **FLG** ☐ **GA** ☐ **GWT** ☐ **LG** ☐ **MB** ☐ **MBL** ☐ **PNA** ☐ **PNC** ☐ **RD** ☐ **SGR** ☐ **SND** ☐ **SS** ☐ **TBZ** ☐ **TGP** ☐ **TNG** ☐ **TTL** ☐ **WT** ☐ **YEL**	☐ (blank) (No coating) ☐ **-C** (Coating)	☐ **-NL** (No Lens) ☐ **-CL** (Clear Lens) ☐ **-FR** (Frosted Lens) ☐ **-MP** (Solite Lens) ☐ **-LS** (Linear Spread) ☐ **-HEX*** (Hex Louver) ☐ **-WW*** (Wall Wash) * Note: Can only fit 1 media if HEX or WW is selected	☐ **NL** ☐ **CL** ☐ **FR** ☐ **MP** ☐ **LS**	**-0**

1. Includes larger canopy
2. Forward and reverse dimming at 120V only

Media

- ☐ **S3-LENS-CL-0** (Clear Lens)
- ☐ **S3-LENS-FR-0** (Frosted Lens)
- ☐ **S3-LENS-MP-0** (Solite Lens)
- ☐ **S3-LENS-LS-0** (Linear Spread)
- ☐ **S3-LENS-HEX-0*** (Hex Louver)
- ☐ **S3-LENS-WW-0*** (Wall Wash)

*Note: Can only fit 1 media if HEX or WW is selected

Emergency

- ☐ **EM-1000** (25W LED Remote Inverter)
- ☐ **EM-1002** (10W LED Remote Emergency Driver)

Spec-00256 Revised 10/08/2021

Patent: www.csllighting.com/patents

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.csllighting.com
©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc. All rights reserved. Subject to change without notice.