

# 2" Wall Mount Cylinder

## 15W LED Up or Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

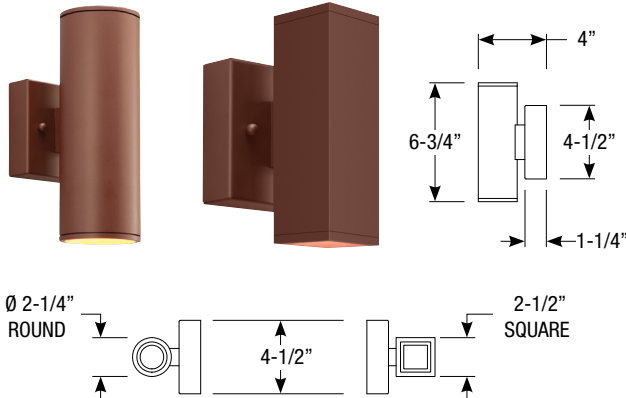

### STANDARD FINISHES

	<b>ABL</b> (Aegean Blue)		<b>PNC</b> (Painted Natural Copper)
	<b>BB</b> (Burnished Bronze)		<b>RD</b> (Red)
	<b>BK</b> (Gloss Black)		<b>SGR</b> (Sage Green)
	<b>BLU</b> (Blue)		<b>SND</b> (Sand)
	<b>DVG</b> (Dove Gray)		<b>SS</b> (Satin Silver)
	<b>FLG</b> (Flannel Gray)		<b>TBZ</b> (Textured Bronze)
	<b>GA</b> (Galvanized)		<b>TGP</b> (Textured Graphite)
	<b>GWT</b> (Gloss White)		<b>TNG</b> (Tangerine)
	<b>LG</b> (Lime Green)		<b>TTL</b> (Tahitian Teal)
	<b>MB</b> (Matte Black)		<b>WT</b> (Semi Gloss White)
	<b>MBL</b> (Midnight Blue)		<b>YEL</b> (Yellow)
	<b>PNA</b> (Painted Natural Aluminum)		

### Electrical Data (In one direction)

CCT	CRI	Wattage	Source Lumens	Delivered Lumens	Efficacy
2700K	90 CRI	15W	1065lm	821lm	55lpw
3000K	90 CRI	15W	1145lm	880lm	59lpw
3500K	90 CRI	15W	1230lm	947lm	63lpw
4000K	80 CRI	15W	1515lm	1167lm	78lpw

### Multiplier for Delivered Lumens

Wattage	10	15
Multiplier	0.69	1

### Specifications

#### LED Light Engine

- LED with 2 SDCM binning
- 10°, 30°, 50° and 80° optics

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Downlight Cylinder

- Utilizes one LED to illuminate in one direction

#### Mounting

Square 4-1/2" x 1-1/4" canopy included with standard universal dim driver.  
 (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)

#### Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- ADA Compliant
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.



## Order Matrix

2" Wall Mount Cylinder (Example: LWU2-10-35-10-BK-4-S)

Series	Wattage	CCT / CRI	Optic	Finish	Coastal Coating	Rev	Driver	Canopy
Round LWU2 (Up) LWD2 (Down)	-10 -15	-27 (2700K / 90 CRI) -30 (3000K / 90 CRI) -35 (3500K / 90 CRI) -40 (4000K / 80 CRI)	-10 -30 -50 -80	-ABL (Aegean Blue) -BB (Burnished Bronze) -BK (Gloss Black) -BLU (Blue) -DVG (Dove Gray) -FLG (Flannel Gray) -GA (Galvanized) -GWT (Gloss White) -LG (Lime Green) -MBL (Midnight Blue) -MB (Matte Black) -PNA (Painted Natural Aluminum) -PNC (Painted Natural Copper) -RD (Red) -SGR (Sage Green) -SND (Sand) -SS (Satin Silver) -TBZ (Textured Bronze) -TGP (Textured Graphite) -TNG (Tangerine) -TTL (Tahitian Teal) -WT (Semi Gloss White) -YEL (Yellow)	(blank) (No coating) -C (Coating)	-4	-S <sup>2</sup> (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V) -L1 <sup>1</sup> (Lutron Hi-lume® 2-Wire 1% 120V) -L3 <sup>1</sup> (Lutron Hi-lume® Fade-to-Black 1% 120-277V) -EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V) -EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V) -DMX <sup>1</sup> (DMX 1% 120-277V)	(blank) (Damp Listed) -WL <sup>3</sup> (Wet Listed)
Square SLWU2 (Up) SLWD2 (Down)								

### Emergency

EM-1000 (25W LED Remote Inverter)

### Optic

EDLM-10-OPTIC-3 (10° Spot)  
 EDLM-30-OPTIC-3 (30° Spot)  
 EDLM-50-OPTIC-3 (50° Spot)  
 EDLM-80-OPTIC-3 (80° Spot)

1. Includes larger canopy
2. Forward and reverse dimming at 120V only
3. Wet Listed option only available for Round housings with Standard ERP driver

Spec-00231 Revised 10/08/2021

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com  
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.  
 All rights reserved. Subject to change without notice.

