

5" Wall Mount Cylinder

35W LED Up or Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

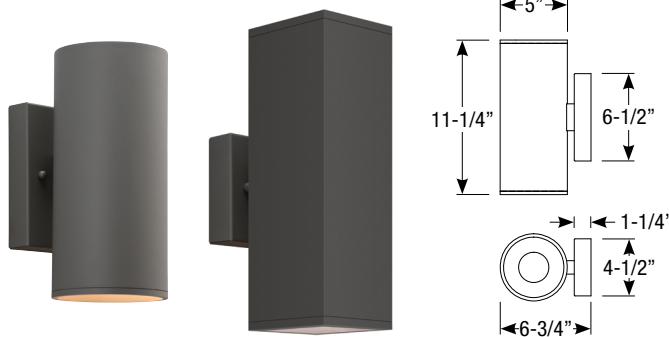

STANDARD FINISHES

| | |
|---|---|
|  ABL (Aegean Blue) |  PNC (Painted Natural Copper) |
|  BB (Burnished Bronze) |  RD (Red) |
|  BK (Gloss Black) |  SGR (Sage Green) |
|  BLU (Blue) |  SND (Sand) |
|  DVG (Dove Gray) |  SS (Satin Silver) |
|  FLG (Flannel Gray) |  TBZ (Textured Bronze) |
|  GA (Galvanized) |  TGP (Textured Graphite) |
|  GWT (Gloss White) |  TNG (Tangerine) |
|  LG (Lime Green) |  TTL (Tahitian Teal) |
|  MB (Matte Black) |  WT (Semi Gloss White) |
|  MBL (Midnight Blue) |  YEL (Yellow) |
|  PNA (Painted Natural Aluminum) | |

Electrical Data (In one direction)

| CCT | CRI | Wattage | Source Lumens | Delivered Lumens | Efficacy |
|-------|--------|---------|---------------|------------------|----------|
| 2700K | 90 CRI | 35W | 2985lm | 2299lm | 66lpw |
| 3000K | 90 CRI | 35W | 3435lm | 2644lm | 76lpw |
| 3500K | 90 CRI | 35W | 3435lm | 2644lm | 76lpw |
| 4000K | 80 CRI | 35W | 4245lm | 3266lm | 93lpw |

Multiplier for Delivered Lumens

| Wattage | 10 | 15 | 20 | 25 | 30 | 35 |
|------------|------|-----|------|------|------|----|
| Multiplier | 0.34 | 0.5 | 0.61 | 0.73 | 0.81 | 1 |

Specifications

Field Replaceable LED Light Engine

- 35W LED with 2 SDCM binning
- 2700K, 3000K and 3500K at 90 CRI / 4000K at 80 CRI
- 10°, 30°, 50° and 80° optics

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

Downlight Cylinder

- Utilizes one LED to illuminate in one direction

Mounting

Square 6-1/2" x 4-1/2" x 1-1/4" canopy included with standard universal dim driver. (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)



Order Matrix

5" Wall Mount Cylinder (Example: LWU5-30-35-10-BK-2-S)

| Series | Wattage | CCT / CRI | Optic | Finish | Coastal Coating | Rev | Driver | Canopy |
|--------------|---------|----------------------|-------|---------------------------------|----------------------|-----|--|-------------------------------|
| Round | | | | | | | | |
| LWU5 (Up) | -10 | -27 (2700K / 90 CRI) | -10 | -ABL (Aegean Blue) | (blank) (No coating) | -2 | -S ² (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V) | (blank) (Damp Listed) |
| LWD5 (Down) | -15 | -30 (3000K / 90 CRI) | -30 | -BB (Burnished Bronze) | -C (Coating) | | -L1 ¹ (Lutron Hi-lume® 2-Wire 1% 120V) | -WL ³ (Wet Listed) |
| | -20 | -35 (3500K / 90 CRI) | -50 | -BK (Gloss Black) | | | -L3 ¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V) | |
| Square | | | | | | | | |
| SLWU5 (Up) | -30 | -40 (4000K / 80 CRI) | -80 | -BLU (Blue) | | | -EL1 ¹ (eldoLED DALI 1% 120-277V) | |
| SLWD5 (Down) | -35 | | | -DVG (Dove Gray) | | | -EL2 ¹ (eldoLED 0-10V 1% 120-277V) | |
| | | | | -FLG (Flannel Gray) | | | -DMX ¹ (DMX 1% 120-277V) | |
| | | | | -GA (Galvanized) | | | | |
| | | | | -GWT (Gloss White) | | | | |
| | | | | -LG (Lime Green) | | | | |
| | | | | -MBL (Midnight Blue) | | | | |
| | | | | -MB (Matte Black) | | | | |
| | | | | -PNA (Painted Natural Aluminum) | | | | |
| | | | | -PNC (Painted Natural Copper) | | | | |
| | | | | -RD (Red) | | | | |
| | | | | -SGR (Sage Green) | | | | |
| | | | | -SND (Sand) | | | | |
| | | | | -SS (Satin Silver) | | | | |
| | | | | -TBZ (Textured Bronze) | | | | |
| | | | | -TGP (Textured Graphite) | | | | |
| | | | | -TNG (Tangerine) | | | | |
| | | | | -TTL (Tahitian Teal) | | | | |
| | | | | -WT (Semi Gloss White) | | | | |
| | | | | -YEL (Yellow) | | | | |

Emergency

EM-1004 (50W LED Remote Inverter)

Optic

EDL5-10-OPTIC-1 (10° Spot)
 EDL5-30-OPTIC-1 (30° Spot)
 EDL5-50-OPTIC-1 (50° Spot)
 EDL5-80-OPTIC-1 (80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00233 Revised 10/08/2021

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.csllighting.com
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.
 All rights reserved. Subject to change without notice.

