

# 3" Wall Mount Cylinder

## 25W LED Up and Downlight (Round or Square)


Catalog #:

Type:





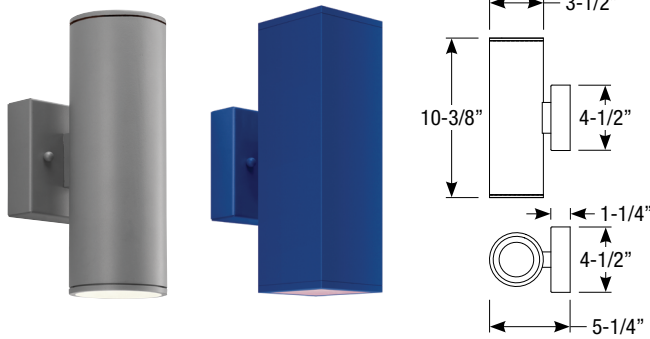







Project:

Date:

Notes:



### STANDARD FINISHES

 <b>ABL</b> (Aegean Blue)	 <b>PNC</b> (Painted Natural Copper)
 <b>BB</b> (Burnished Bronze)	 <b>RD</b> (Red)
 <b>BK</b> (Gloss Black)	 <b>SGR</b> (Sage Green)
 <b>BLU</b> (Blue)	 <b>SND</b> (Sand)
 <b>DVG</b> (Dove Gray)	 <b>SS</b> (Satin Silver)
 <b>FLG</b> (Flannel Gray)	 <b>TBZ</b> (Textured Bronze)
 <b>GA</b> (Galvanized)	 <b>TGP</b> (Textured Graphite)
 <b>GWT</b> (Gloss White)	 <b>TNG</b> (Tangerine)
 <b>LG</b> (Lime Green)	 <b>TTL</b> (Tahitian Teal)
 <b>MB</b> (Matte Black)	 <b>WT</b> (Semi Gloss White)
 <b>MBL</b> (Midnight Blue)	 <b>YEL</b> (Yellow)
 <b>PNA</b> (Painted Natural Aluminum)	

### Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Source Lumens	Delivered Lumens	Efficacy
2700K	90 CRI	12.5 / 25W	1115 / 2230lm	858 / 1716lm	69lpw
3000K	90 CRI	12.5 / 25W	1195 / 2390lm	919 / 1838lm	74lpw
3500K	90 CRI	12.5 / 25W	1285 / 2565lm	987 / 1975lm	79lpw
4000K	80 CRI	12.5 / 25W	1695 / 3395lm	1306 / 2612lm	104lpw

### Multiplier for Delivered Lumens

Wattage	10	15	20	25
Multiplier	0.45	0.69	0.83	1

### Specifications

#### Field Replaceable LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K and 3500K at 90 CRI / 4000K at 80 CRI
- 10°, 30°, 50° and 80° optics

#### Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

#### Mounting

Square 4½" x 1¼" backplate included with standard universal dim driver.  
 (7½" x 6" x 1¼" backplate included with Lutron and eldoLED drivers)



## Order Matrix

3" Wall Mount Cylinder (Example: LWU3-10-35-10-10-BK-5-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round <b>LWUD3</b> (Up and Down)	-10	-27 (2700K / 90 CRI)	-10	-10	-ABL (Aegean Blue)	(blank) (No coating)	-5	-S <sup>2</sup> (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V)	(blank) (Damp Listed)
	-15	-30 (3000K / 90 CRI)	-30	-30	-BB (Burnished Bronze)	-C (Coating)			-WL <sup>3</sup> (Wet Listed)
	-20	-35 (3500K / 90 CRI)	-50	-50	-BK (Gloss Black)			-L1 <sup>1</sup> (Lutron Hi-lume® 2-Wire 1% 20V)	
	-25	-40 (4000K / 80 CRI)	-80	-80	-BLU (Blue)			-L3 <sup>1</sup> (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	
Square <b>SLWUD3</b> (Up and Down)					-DVG (Dove Gray)			-EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V)	
					-FLG (Flannel Gray)			-EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V)	
					-GA (Galvanized)			-DMX <sup>1</sup> (DMX 1% 120-277V)	
					-GWT (Gloss White)				
					-LG (Lime Green)				
					-MBL (Midnight Blue)				
					-MB (Matte Black)				
					-PNA (Painted Natural Aluminum)				
					-PNC (Painted Natural Copper)				
					-RD (Red)				
					-SGR (Sage Green)				
					-SND (Sand)				
					-SS (Satin Silver)				
					-TBZ (Textured Bronze)				
					-TGP (Textured Graphite)				
					-TNG (Tangerine)				
					-TTL (Tahitian Teal)				
					-WT (Semi Gloss White)				
				-YEL (Yellow)					

### Emergency

- EM-1000 (25W LED Remote Inverter)
- EM-1003 (35W LED Remote Inverter)
- EM-1004 (50W LED Remote Inverter)

### Optic

- EDL-10-OPTIC-5 (10° Spot)
- EDL-30-OPTIC-4 (30° Spot)
- EDL-50-OPTIC-4 (50° Spot)
- EDL-80-OPTIC-4 (80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00235 Revised 10/08/2021

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com  
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.  
 All rights reserved. Subject to change without notice.

