

# 2" Wall Mount Cylinder

## 15W LED Up and Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

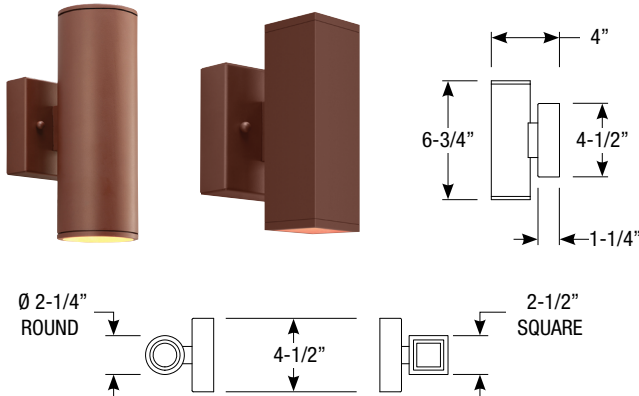

### STANDARD FINISHES

<b>ABL</b> (Aegean Blue)	<b>PNC</b> (Painted Natural Copper)
<b>BB</b> (Burnished Bronze)	<b>RD</b> (Red)
<b>BK</b> (Gloss Black)	<b>SGR</b> (Sage Green)
<b>BLU</b> (Blue)	<b>SND</b> (Sand)
<b>DVG</b> (Dove Gray)	<b>SS</b> (Satin Silver)
<b>FLG</b> (Flannel Gray)	<b>TBZ</b> (Textured Bronze)
<b>GA</b> (Galvanized)	<b>TGP</b> (Textured Graphite)
<b>GWT</b> (Gloss White)	<b>TNG</b> (Tangerine)
<b>LG</b> (Lime Green)	<b>TTL</b> (Tahitian Teal)
<b>MB</b> (Matte Black)	<b>WT</b> (Semi Gloss White)
<b>MBL</b> (Midnight Blue)	<b>YEL</b> (Yellow)
<b>PNA</b> (Painted Natural Aluminum)	

### Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	7.5W / 15W	410 / 821lm	55lpw
3000K	90 CRI	7.5W / 15W	440 / 880lm	59lpw
3500K	90 CRI	7.5W / 15W	473 / 947lm	63lpw
4000K	90 CRI	7.5W / 15W	475 / 947lm	63lpw

### Multiplier for Delivered Lumens

Wattage	10	15
Multiplier	0.69	1

### Specifications

#### LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

#### Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- ADA Compliant
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

#### Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

#### Mounting

Square 4-1/2" x 1-1/4" canopy included with standard universal dim driver.  
 (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)



JAS TITLE 24 COMPLIANT

## Order Matrix

2" Wall Mount Cylinder (Example: LWUD2-10-35-10-BK-4-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round <b>LWUD2</b> (Up and Down)	<b>-10</b> <b>-15</b>	<b>-27</b> (2700K / 90 CRI)	<b>-10</b>	<b>-10</b>	<b>-ABL</b> (Aegean Blue)	(blank) (No coating) <b>-C</b> (Coating)	<b>-4</b>	<b>-S<sup>2</sup></b> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	(blank) (Damp Listed) <b>-WL<sup>3</sup></b> (Wet Listed)
		<b>-30</b> (3000K / 90 CRI)			<b>-BB</b> (Burnished Bronze)				
		<b>-35</b> (3500K / 90 CRI)			<b>-BK</b> (Gloss Black)				
		<b>-40</b> (4000K / 90 CRI)			<b>-BLU</b> (Blue)				
Square <b>SLWUD2</b> (Up and Down)  Square Housing only for use in damp locations.					<b>-DVG</b> (Dove Gray)			<b>-L1<sup>1</sup></b> (Lutron Hi-lume <sup>®</sup> 2-Wire 1% 120V) <b>-L3<sup>1</sup></b> (Lutron Hi-lume <sup>®</sup> Fade-to-Black 1% 120-277V)	
		<b>-FLG</b> (Flannel Gray)			<b>-EL1<sup>1</sup></b> (eldoLED DALI 1% 120-277V)				
		<b>-GA</b> (Galvanized)			<b>-EL2<sup>1</sup></b> (eldoLED 0-10V 1% 120-277V)				
		<b>-GWT</b> (Gloss White)			<b>-DMX<sup>1</sup></b> (DMX 1% 120-277V)				
		<b>-LG</b> (Lime Green)							
		<b>-MBL</b> (Midnight Blue)							
		<b>-MB</b> (Matte Black)							
		<b>-PNA</b> (Painted Natural Aluminum)							
		<b>-PNC</b> (Painted Natural Copper)							
		<b>-RD</b> (Red)							
		<b>-SGR</b> (Sage Green)							
		<b>-SND</b> (Sand)							
		<b>-SS</b> (Satin Silver)							
		<b>-TBZ</b> (Textured Bronze)							
		<b>-TGP</b> (Textured Graphite)							
		<b>-TNG</b> (Tangerine)							
<b>-TTL</b> (Tahitian Teal)									
<b>-WT</b> (Semi Gloss White)									
<b>-YEL</b> (Yellow)									

### Emergency

<b>EM-1000</b>	(25W Remote Inverter)
<b>EM-1002</b>	(10W Remote Inverter)
<b>EM-1003</b>	(35W Remote Inverter)
<b>EM-1003-CA</b>	(35W Remote Inverter) Title 20
<b>EM-1004</b>	(50W Remote Inverter)
<b>EM-1006</b>	(25W Remote Inverter) Title 20

### Optic

<b>EDLM-10-OPTIC-3</b>	(10° Spot)
<b>EDLM-30-OPTIC-3</b>	(30° Spot)
<b>EDLM-50-OPTIC-3</b>	(50° Spot)
<b>EDLM-80-OPTIC-3</b>	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00234 Revised 07/13/2022

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com  
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.  
 All rights reserved. Subject to change without notice.

