

2" Wall Mount Cylinder

15W LED Up and Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

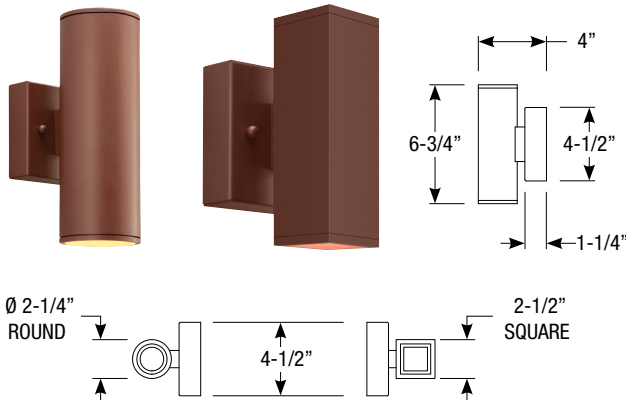

STANDARD FINISHES

■ ABL (Aegean Blue)	■ PNC (Painted Natural Copper)
■ BB (Burnished Bronze)	■ RD (Red)
■ BK (Gloss Black)	■ SGR (Sage Green)
■ BLU (Blue)	■ SND (Sand)
■ DVG (Dove Gray)	■ SS (Satin Silver)
■ FLG (Flannel Gray)	■ TBZ (Textured Bronze)
■ GA (Galvanized)	■ TGP (Textured Graphite)
■ GWT (Gloss White)	■ TNG (Tangerine)
■ LG (Lime Green)	■ TTL (Tahitian Teal)
■ MB (Matte Black)	■ WT (Semi Gloss White)
■ MBL (Midnight Blue)	■ YEL (Yellow)
■ PNA (Painted Natural Aluminum)	

Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	7.5W / 15W	410 / 821lm	55lpw
3000K	90 CRI	7.5W / 15W	440 / 880lm	59lpw
3500K	90 CRI	7.5W / 15W	473 / 947lm	63lpw
4000K	90 CRI	7.5W / 15W	475 / 947lm	63lpw

Multiplier for Delivered Lumens

Wattage	10	15
Multiplier	0.69	1

Specifications

LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- ADA Compliant
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

Mounting

Square 4-1/2" x 1-1/4" canopy included with standard universal dim driver.
 (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)



JAS TITLE 24 COMPLIANT

Order Matrix

2" Wall Mount Cylinder (Example: LWUD2-10-35-10-BK-4-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round LWUD2 (Up and Down)	-10 -15	-27 (2700K / 90 CRI)	-10	-10	-ABL (Aegean Blue)	(blank) (No coating) -C (Coating)	-4	-S² (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V)	(blank) (Damp Listed) -WL³ (Wet Listed)
		-30 (3000K / 90 CRI)			-BB (Burnished Bronze)				
		-35 (3500K / 90 CRI)			-BK (Gloss Black)				
		-40 (4000K / 90 CRI)			-BLU (Blue)				
Square SLWUD2 (Up and Down) Square Housing only for use in damp locations.					-DVG (Dove Gray)			-L1¹ (Lutron Hi-lume® 2-Wire 1% 120V) -L3¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	
		-FLG (Flannel Gray)			-EL1¹ (eldoLED DALI 1% 120-277V)				
		-GA (Galvanized)			-EL2¹ (eldoLED 0-10V 1% 120-277V)				
		-GWT (Gloss White)			-DMX¹ (DMX 1% 120-277V)				
		-LG (Lime Green)							
		-MBL (Midnight Blue)							
		-MB (Matte Black)							
		-PNA (Painted Natural Aluminum)							
		-PNC (Painted Natural Copper)							
		-RD (Red)							
		-SGR (Sage Green)							
		-SND (Sand)							
		-SS (Satin Silver)							
		-TBZ (Textured Bronze)							
		-TGP (Textured Graphite)							
		-TNG (Tangerine)							
		-TTL (Tahitian Teal)							
-WT (Semi Gloss White)									
-YEL (Yellow)									

Emergency

EM-1000	(25W Remote Inverter)
EM-1002	(10W Remote Inverter)
EM-1003	(35W Remote Inverter)
EM-1003-CA	(35W Remote Inverter) Title 20
EM-1004	(50W Remote Inverter)
EM-1006	(25W Remote Inverter) Title 20

Optic

EDLM-10-OPTIC-3	(10° Spot)
EDLM-30-OPTIC-3	(30° Spot)
EDLM-50-OPTIC-3	(50° Spot)
EDLM-80-OPTIC-3	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00234 Revised 03/10/2022

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.
 All rights reserved. Subject to change without notice.

