

# 3" Wall Mount Cylinder

## 25W LED Up and Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

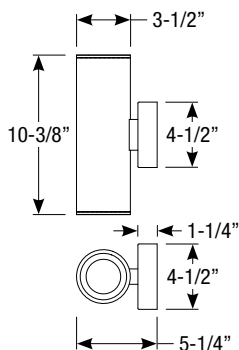

### STANDARD FINISHES

	<b>ABL</b> (Aegean Blue)		<b>PNC</b> (Painted Natural Copper)
	<b>BB</b> (Burnished Bronze)		<b>RD</b> (Red)
	<b>BK</b> (Gloss Black)		<b>SGR</b> (Sage Green)
	<b>BLU</b> (Blue)		<b>SND</b> (Sand)
	<b>DVG</b> (Dove Gray)		<b>SS</b> (Satin Silver)
	<b>FLG</b> (Flannel Gray)		<b>TBZ</b> (Textured Bronze)
	<b>GA</b> (Galvanized)		<b>TGP</b> (Textured Graphite)
	<b>GWT</b> (Gloss White)		<b>TNG</b> (Tangerine)
	<b>LG</b> (Lime Green)		<b>TTL</b> (Tahitian Teal)
	<b>MB</b> (Matte Black)		<b>WT</b> (Semi Gloss White)
	<b>MBL</b> (Midnight Blue)		<b>YEL</b> (Yellow)
	<b>PNA</b> (Painted Natural Aluminum)		

### Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	12.5 / 25W	858 / 1716lm	69lpw
3000K	90 CRI	12.5 / 25W	919 / 1838lm	74lpw
3500K	90 CRI	12.5 / 25W	987 / 1975lm	79lpw
4000K	90 CRI	12.5 / 25W	1075 / 2107lm	84lpw

### Multiplier for Delivered Lumens

Wattage	10	15	20	25
Multiplier	0.45	0.69	0.83	1

### Specifications

#### Field Replaceable LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

#### Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

#### Mounting

Square 4½" x 1¼" backplate included with standard universal dim driver.  
 (7½" x 6" x 1¼" backplate included with Lutron and eldoLED drivers)



JAS TITLE 24 COMPLIANT

## Order Matrix

### 3" Wall Mount Cylinder (Example: LWU3-10-35-10-10-BK-5-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round <b>LWUD3</b> (Up and Down)	-10	-27 (2700K / 90 CRI)	-10	-10	-ABL (Aegean Blue)	(blank) (No coating)	-5	-S <sup>2</sup> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	(blank) (Damp Listed)
	-15	-30 (3000K / 90 CRI)	-30	-30	-BB (Burnished Bronze)	-C (Coating)		-L1 <sup>1</sup> (Lutron Hi-lume® 2-Wire 1% 20V)	-WL <sup>3</sup> (Wet Listed)
	-20	-35 (3500K / 90 CRI)	-50	-50	-BK (Gloss Black)			-L3 <sup>1</sup> (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	
	-25	-40 (4000K / 90 CRI)	-80	-80	-BLU (Blue)			-EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V)	
Square <b>SLWUD3</b> (Up and Down)  Square Housing only for use in damp locations.					-DVG (Dove Gray)			-EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V)	
					-FLG (Flannel Gray)			-DMX <sup>1</sup> (DMX 1% 120-277V)	
					-GA (Galvanized)				
					-GWT (Gloss White)				
					-LG (Lime Green)				
					-MBL (Midnight Blue)				
					-MB (Matte Black)				
					-PNA (Painted Natural Aluminum)				
					-PNC (Painted Natural Copper)				
					-RD (Red)				
					-SGR (Sage Green)				
					-SND (Sand)				
					-SS (Satin Silver)				
					-TBZ (Textured Bronze)				
					-TGP (Textured Graphite)				
					-TNG (Tangerine)				
					-TTL (Tahitian Teal)				
					-WT (Semi Gloss White)				
				-YEL (Yellow)					

### Emergency

<b>EM-1000</b>	(25W Remote Inverter)
<b>EM-1002</b>	(10W Remote Inverter)
<b>EM-1003</b>	(35W Remote Inverter)
<b>EM-1003-CA</b>	(35W Remote Inverter) Title 20
<b>EM-1004</b>	(50W Remote Inverter)
<b>EM-1006</b>	(25W Remote Inverter) Title 20

### Optic

<b>EDL-10-OPTIC-5</b>	(10° Spot)
<b>EDL-30-OPTIC-4</b>	(30° Spot)
<b>EDL-50-OPTIC-4</b>	(50° Spot)
<b>EDL-80-OPTIC-4</b>	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00235 Revised 07/13/2022

