

3" Wall Mount Cylinder

25W LED Up and Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

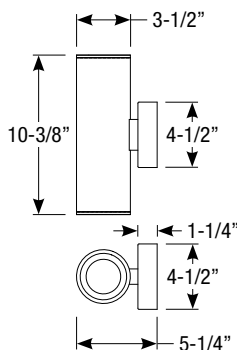

STANDARD FINISHES

	ABL (Aegean Blue)		PNC (Painted Natural Copper)
	BB (Burnished Bronze)		RD (Red)
	BK (Gloss Black)		SGR (Sage Green)
	BLU (Blue)		SND (Sand)
	DVG (Dove Gray)		SS (Satin Silver)
	FLG (Flannel Gray)		TBZ (Textured Bronze)
	GA (Galvanized)		TGP (Textured Graphite)
	GWT (Gloss White)		TNG (Tangerine)
	LG (Lime Green)		TTL (Tahitian Teal)
	MB (Matte Black)		WT (Semi Gloss White)
	MBL (Midnight Blue)		YEL (Yellow)
	PNA (Painted Natural Aluminum)		

Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	12.5 / 25W	858 / 1716lm	69lpw
3000K	90 CRI	12.5 / 25W	919 / 1838lm	74lpw
3500K	90 CRI	12.5 / 25W	987 / 1975lm	79lpw
4000K	90 CRI	12.5 / 25W	1075 / 2107lm	84lpw

Multiplier for Delivered Lumens

Wattage	10	15	20	25
Multiplier	0.45	0.69	0.83	1

Specifications

Field Replaceable LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

Mounting

Square 4½" x 1¼" backplate included with standard universal dim driver.
 (7½" x 6" x 1¼" backplate included with Lutron and eldoLED drivers)



JAS TITLE 24 COMPLIANT

Order Matrix

3" Wall Mount Cylinder (Example: LWU3-10-35-10-10-BK-5-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round LWUD3 (Up and Down)	-10	-27 (2700K / 90 CRI)	-10	-10	-ABL (Aegean Blue)	(blank) (No coating)	-5	-S ² (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V)	(blank) (Damp Listed)
	-15	-30 (3000K / 90 CRI)	-30	-30	-BB (Burnished Bronze)	-C (Coating)		-L1 ¹ (Lutron Hi-lume® 2-Wire 1% 20V)	-WL ³ (Wet Listed)
	-20	-35 (3500K / 90 CRI)	-50	-50	-BK (Gloss Black)			-L3 ¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	
	-25	-40 (4000K / 90 CRI)	-80	-80	-BLU (Blue)			-EL1 ¹ (eldoLED DALI 1% 120-277V)	
Square SLWUD3 (Up and Down) Square Housing only for use in damp locations.					-DVG (Dove Gray)			-EL2 ¹ (eldoLED 0-10V 1% 120-277V)	
					-FLG (Flannel Gray)			-DMX ¹ (DMX 1% 120-277V)	
					-GA (Galvanized)				
					-GWT (Gloss White)				
					-LG (Lime Green)				
					-MBL (Midnight Blue)				
					-MB (Matte Black)				
					-PNA (Painted Natural Aluminum)				
					-PNC (Painted Natural Copper)				
					-RD (Red)				
					-SGR (Sage Green)				
					-SND (Sand)				
					-SS (Satin Silver)				
					-TBZ (Textured Bronze)				
					-TGP (Textured Graphite)				
					-TNG (Tangerine)				
					-TTL (Tahitian Teal)				
					-WT (Semi Gloss White)				
				-YEL (Yellow)					

Emergency

EM-1000	(25W Remote Inverter)
EM-1002	(10W Remote Inverter)
EM-1003	(35W Remote Inverter)
EM-1003-CA	(35W Remote Inverter) Title 20
EM-1004	(50W Remote Inverter)
EM-1006	(25W Remote Inverter) Title 20

Optic

EDL-10-OPTIC-5	(10° Spot)
EDL-30-OPTIC-4	(30° Spot)
EDL-50-OPTIC-4	(50° Spot)
EDL-80-OPTIC-4	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00235 Revised 04/06/2022

