



LUXE PIVOT

Spec-00289 Luxe Pivot, V1.0


Revised 12/06/24

Project: _____

Type: _____

Note: _____

LUXE PIVOT - LXPV

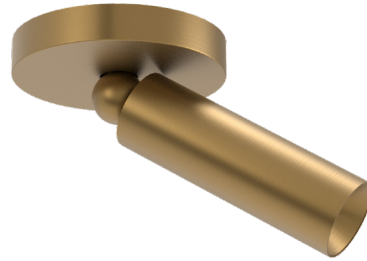

Pivot

LED LIGHT ENGINE	
RATED WATTAGE	14W
DELIVERED LUMENS	Up to: 1037 lm @3500K
CCT/CRI	2700K 90CRI, 3000K 90CRI, 3500K 90CRI
COLOR QUALITY	2700K-3500K 90+ CRI, R9>50, 2-Step SDCM
LED LIFETIME	55,000 hours @ L80
EFFICACY	Up to 74 LPW @3500K

SILENT VU™ OPTICS TECHNOLOGY	
OPTICS	50° Installed

POWER SUPPLY	
INPUT VOLTAGE	120/277V, 50/60Hz
DIMMING	TRIAC, ELV and 0-10V, dims to 1%
SERVICABILITY	Light Module and Driver Field Serviceable

DELIVERED LUMENS MATRIX	
LUXE PIVOT (14W)	50° OPTIC
2700K (90CRI)	927 lm
3000K (90CRI)	982 lm
3500K (90CRI)	1037 lm

STANDARD FINISH

- WT (Semi Gloss White)
- DB (Distressed Bronze)
- MB (Matte Black)
- PBR (Patina Brass)

MOUNTING

- 5" canopy included with standard universal dim driver
- Canopy mounts to a 4" round junction box

LISTING/WARRANTY

- Five (5) year limited warranty
- UL Listed for 40°C Ambient
- CA Title 24-JA8 Compliant



Project: _____

Type: _____

Note: _____

LUXE PIVOT - LXPV

ORDER MATRIX

Decorative Cylinder

(Example: LXPV-13-27-50-DB-S = Pivot, 13W, 2700K, 90CRI, 50°, Distressed Bronze, Standard Driver)

PRODUCT FAMILY/WATTAGE	CCT & CRI	OPTIC	STANDARD FINISH	STANDARD DRIVER
LXPV-13 Pivot Adjustable Cylinder, 13W	-27 2700K 90CRI	-50 50° Optic	-DB Distressed Bronze	-S Universal Dim Driver: 1%-100% 0-10V, TRIAC, ELV, 120V/277V
	-30 3000K 90CRI		-PBR Patina Brass	
	-35 3500K 90CRI		-WT Semi Gloss White	
			-MB Matte Black	Note: TRIAC, ELV dimming for 120V only.


FINISHES




WT
Semi Gloss White






MB
Matte Black



DB
Distressed Bronze



PBR
Patina Brass

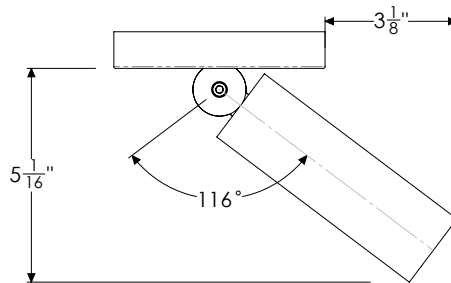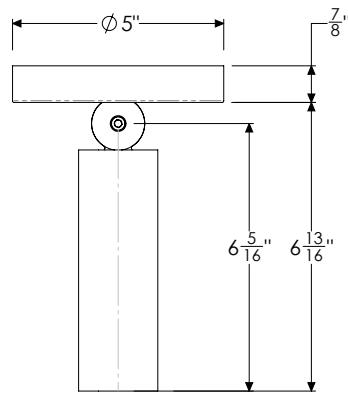

Project: _____

Type: _____


Note: _____

LUXE PIVOT - LXPV


PHOTOMETRICS

Pivot (2700K, 90 CRI, 14W)
50° Optic

Polar Plot

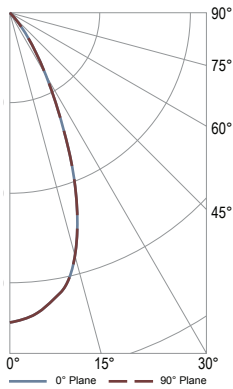

Cone of Light Tabulation

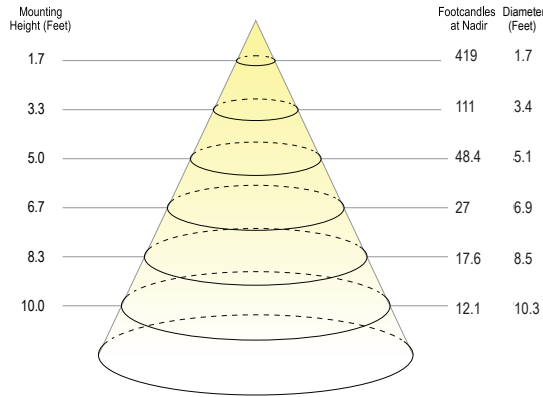

VOLTAGE	CURRENT	POWER
120 VAC	0.12 A	14.07W

POWER FACTOR	FREQUENCY	CURRENT THD
0.99	60 Hz	9%

Summary of Results

Spacing Criteria	Total Lumen Output:	927 Lumens
0-180: 0.88	Luminaire Efficacy:	66 lm/w
90-270: 0.88	Maximum Candela:	1210 Candela

ZONE	LUMENS	% OF LUMINAIRE
0-40	892	96.3%
0-60	925	99.9%
0-90	927	100%



LUXE
PIVOT

Spec-00289 Luxe Pivot, V1.0

Revised 12/06/24

Project: _____

Type: _____

Note: _____

LUXE PIVOT - LXPV

DIMMING DRIVER COMPATIBILITY

“S” STANDARD UNIVERSAL DIM

COMPATIBLE PHASE CUT DIMMER	
MANUFACTURER	PRODUCT
Cooper	DAL06P
	DLC03P
	SLC03P
Leviton	6161
	6631-2
	6633-P
	6673-10W
	6683-IW
	IPE04
	IPI06-1LZ
	VPE06
Lightolier	ZP26QEW
Lutron	CT103P
	DV600P
	DVCL-153P
	DVEL303P
	FAELV500
	LG600P
	MAELV600
	S600P
	S-603PG
	SELV300P
	TG-600P
	TGCL-153P

COMPATIBLE 1-10V DIMMER	
MANUFACTURER	PRODUCT
Leviton	IP740-DLZ
Lightolier	ZP600FAM120
	V2000FAMU
Lutron	DVTV
	NTFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

